

# SS12 THRU SS120


## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 200 Volts    Forward Current - 1.0 Ampere

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction,majority carrier conduction
- ◆ Low power loss,high efficiency
- ◆ Built-in strain relief,ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

**DO-214AC**

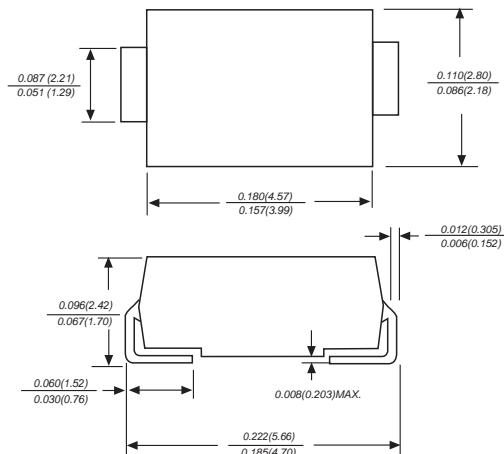

Dimensions in inches and (millimeters)

### MECHANICAL DATA

**Case:** JEDEC DO-214AC molded plastic body

**Terminals:** leads solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight :** 0.058 grams

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz,resistive or inductive load,for capacitive load current derate by 20%.


	SYMBOLS	SS12	SS13	SS14	SS15	SS16	SS18	SS110	SS115	SS120	UNITS
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	20	30	40	50	60	80	100	150	200	VOLTS
Maximum RMS voltage	V <sub>RMS</sub>	14	21	28	35	42	56	70	105	140	VOLTS
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	40	50	60	80	100	150	200	VOLTS
Maximum average forward rectified current at T <sub>L</sub> (see fig.1)	I <sub>(AV)</sub>	1.0									Amp
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	30.0									Amps
Maximum instantaneous forward voltage at 1.0A	V <sub>F</sub>	0.55		0.70		0.85		0.95		Volts	
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	I <sub>R</sub>	0.5				1				mA	
Typical junction capacitance (NOTE 1)	C <sub>J</sub>	6.0			5.0			10			pF
		110			90						
Typical thermal resistance (NOTE 2)	R <sub>qJA</sub>	88.0									°C/W
Operating junction temperature range	T <sub>J</sub>	-65 to +125			-65 to +150						°C
Storage temperature range	T <sub>STG</sub>	-65 to +150									°C

**Note:**1.Measured at 1MHz and applied reverse voltage of 4.0V D.C.


2.P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES SS12 THRU SS120


AVERAGE FORWARD RECTIFIED CURRENT,  
AMPERES

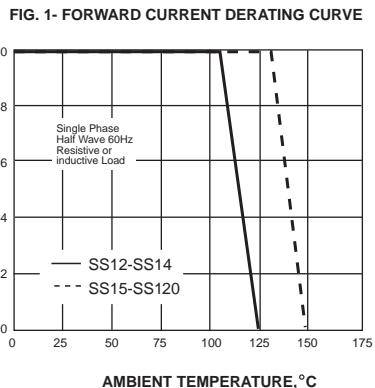


**FIG. 2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

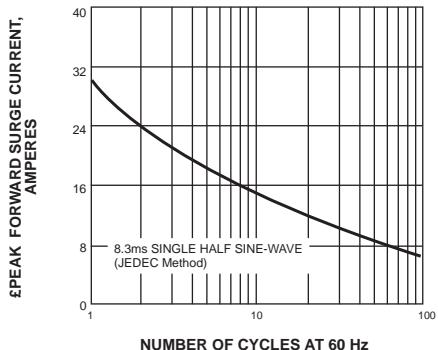


INSTANTANEOUS FORWARD CURRENT, AMPERES

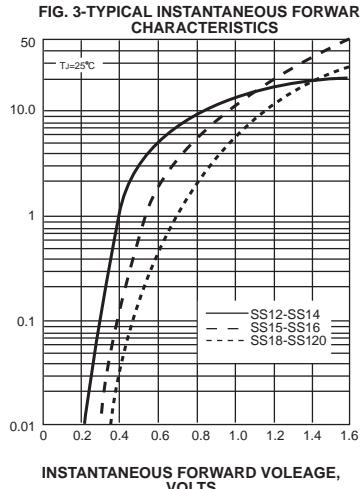

**FIG. 4-TYPICAL REVERSE CHARACTERISTICS**

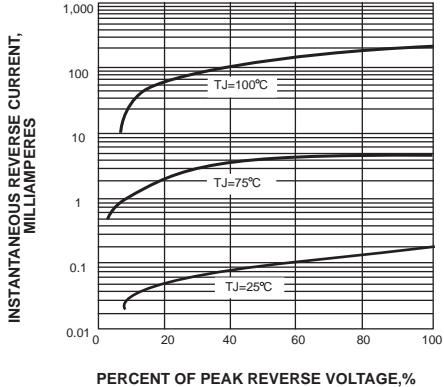

JUNCTION CAPACITANCE, pF

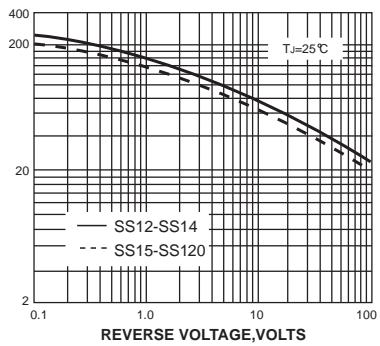

**FIG. 6-TYPICAL TRANSIENT THERMAL IMPEDANCE**

